


# Sensor cable, SKI-55 and SKU-55

## ULRICA Fiber-Optic Distributed Heat Detection System

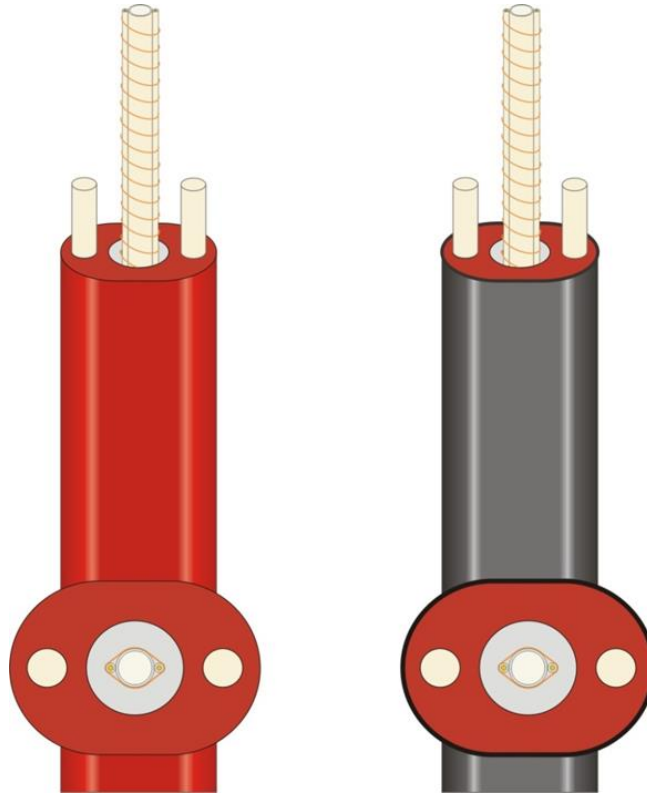

### Product Specification

Size	4 x 6,5 mm
Bending radius (min)	40 mm
Weight	45 kg/km
Jacket	PE, flame retardant, halogen free polyethylene
Load, installation	150 N (max)
Load, operation:	50 N (max)
Temperature range:	-30° C – +90°C (operation) -30° C – +50°C (storage) -0° C – +50°C (installation)
Color	SKI-55 Red, SKU-55 Black. Other colors quoted on request.
Alarm activation	+55°C (other temperatures quoted on request)
Fiber type	Multimode 62.5 µm graded-index core
Fiber connector	FC/PC, multimode 62.5 µm graded-index

### Hudiksvall Fiber Sensor AB

Fibervägen 2  
SE-824 50 Hudiksvall  
SWEDEN

Tel: +46 650 760 10  
URL: [www.hufsab.com](http://www.hufsab.com)  
E-mail: [info@hufsab.com](mailto:info@hufsab.com)